



AIR CLEANER— OIL DIPSTICK-

	REV	DATE	ON COMPOSITE DWGS, SEE PART NO. FOR
	-	0-24-	NEW DRAWING [92089-1]
	Α	3-1-12	SEE SHEET I [CT05555]
	В	5-30-12	SEE SHEET 3 OF 4. [CTI4992]
	С	3 - - 3	SEE SHEET 4 [CT39030]
	D	4 - 6 - 3	SEE SHEET 4 [CT43845]
14/20RESA			
Λ			$\hat{\mathbf{D}}$

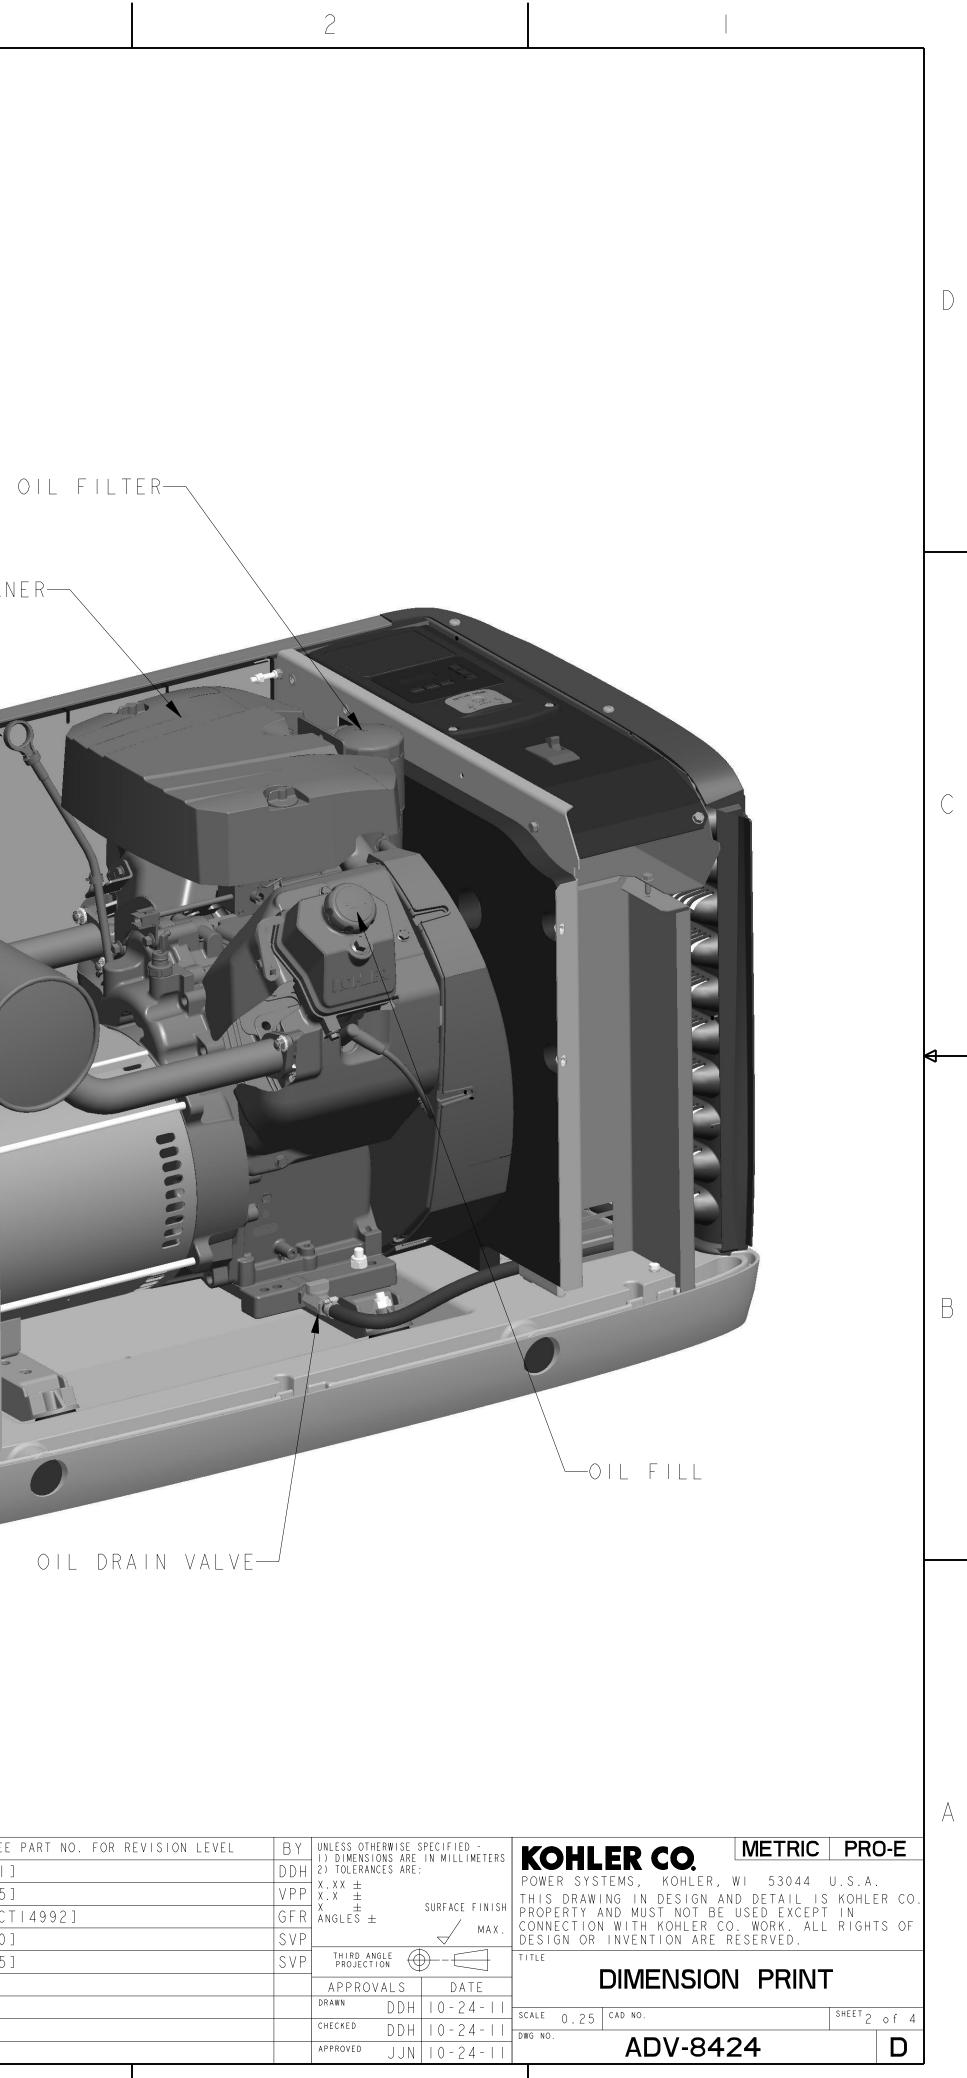

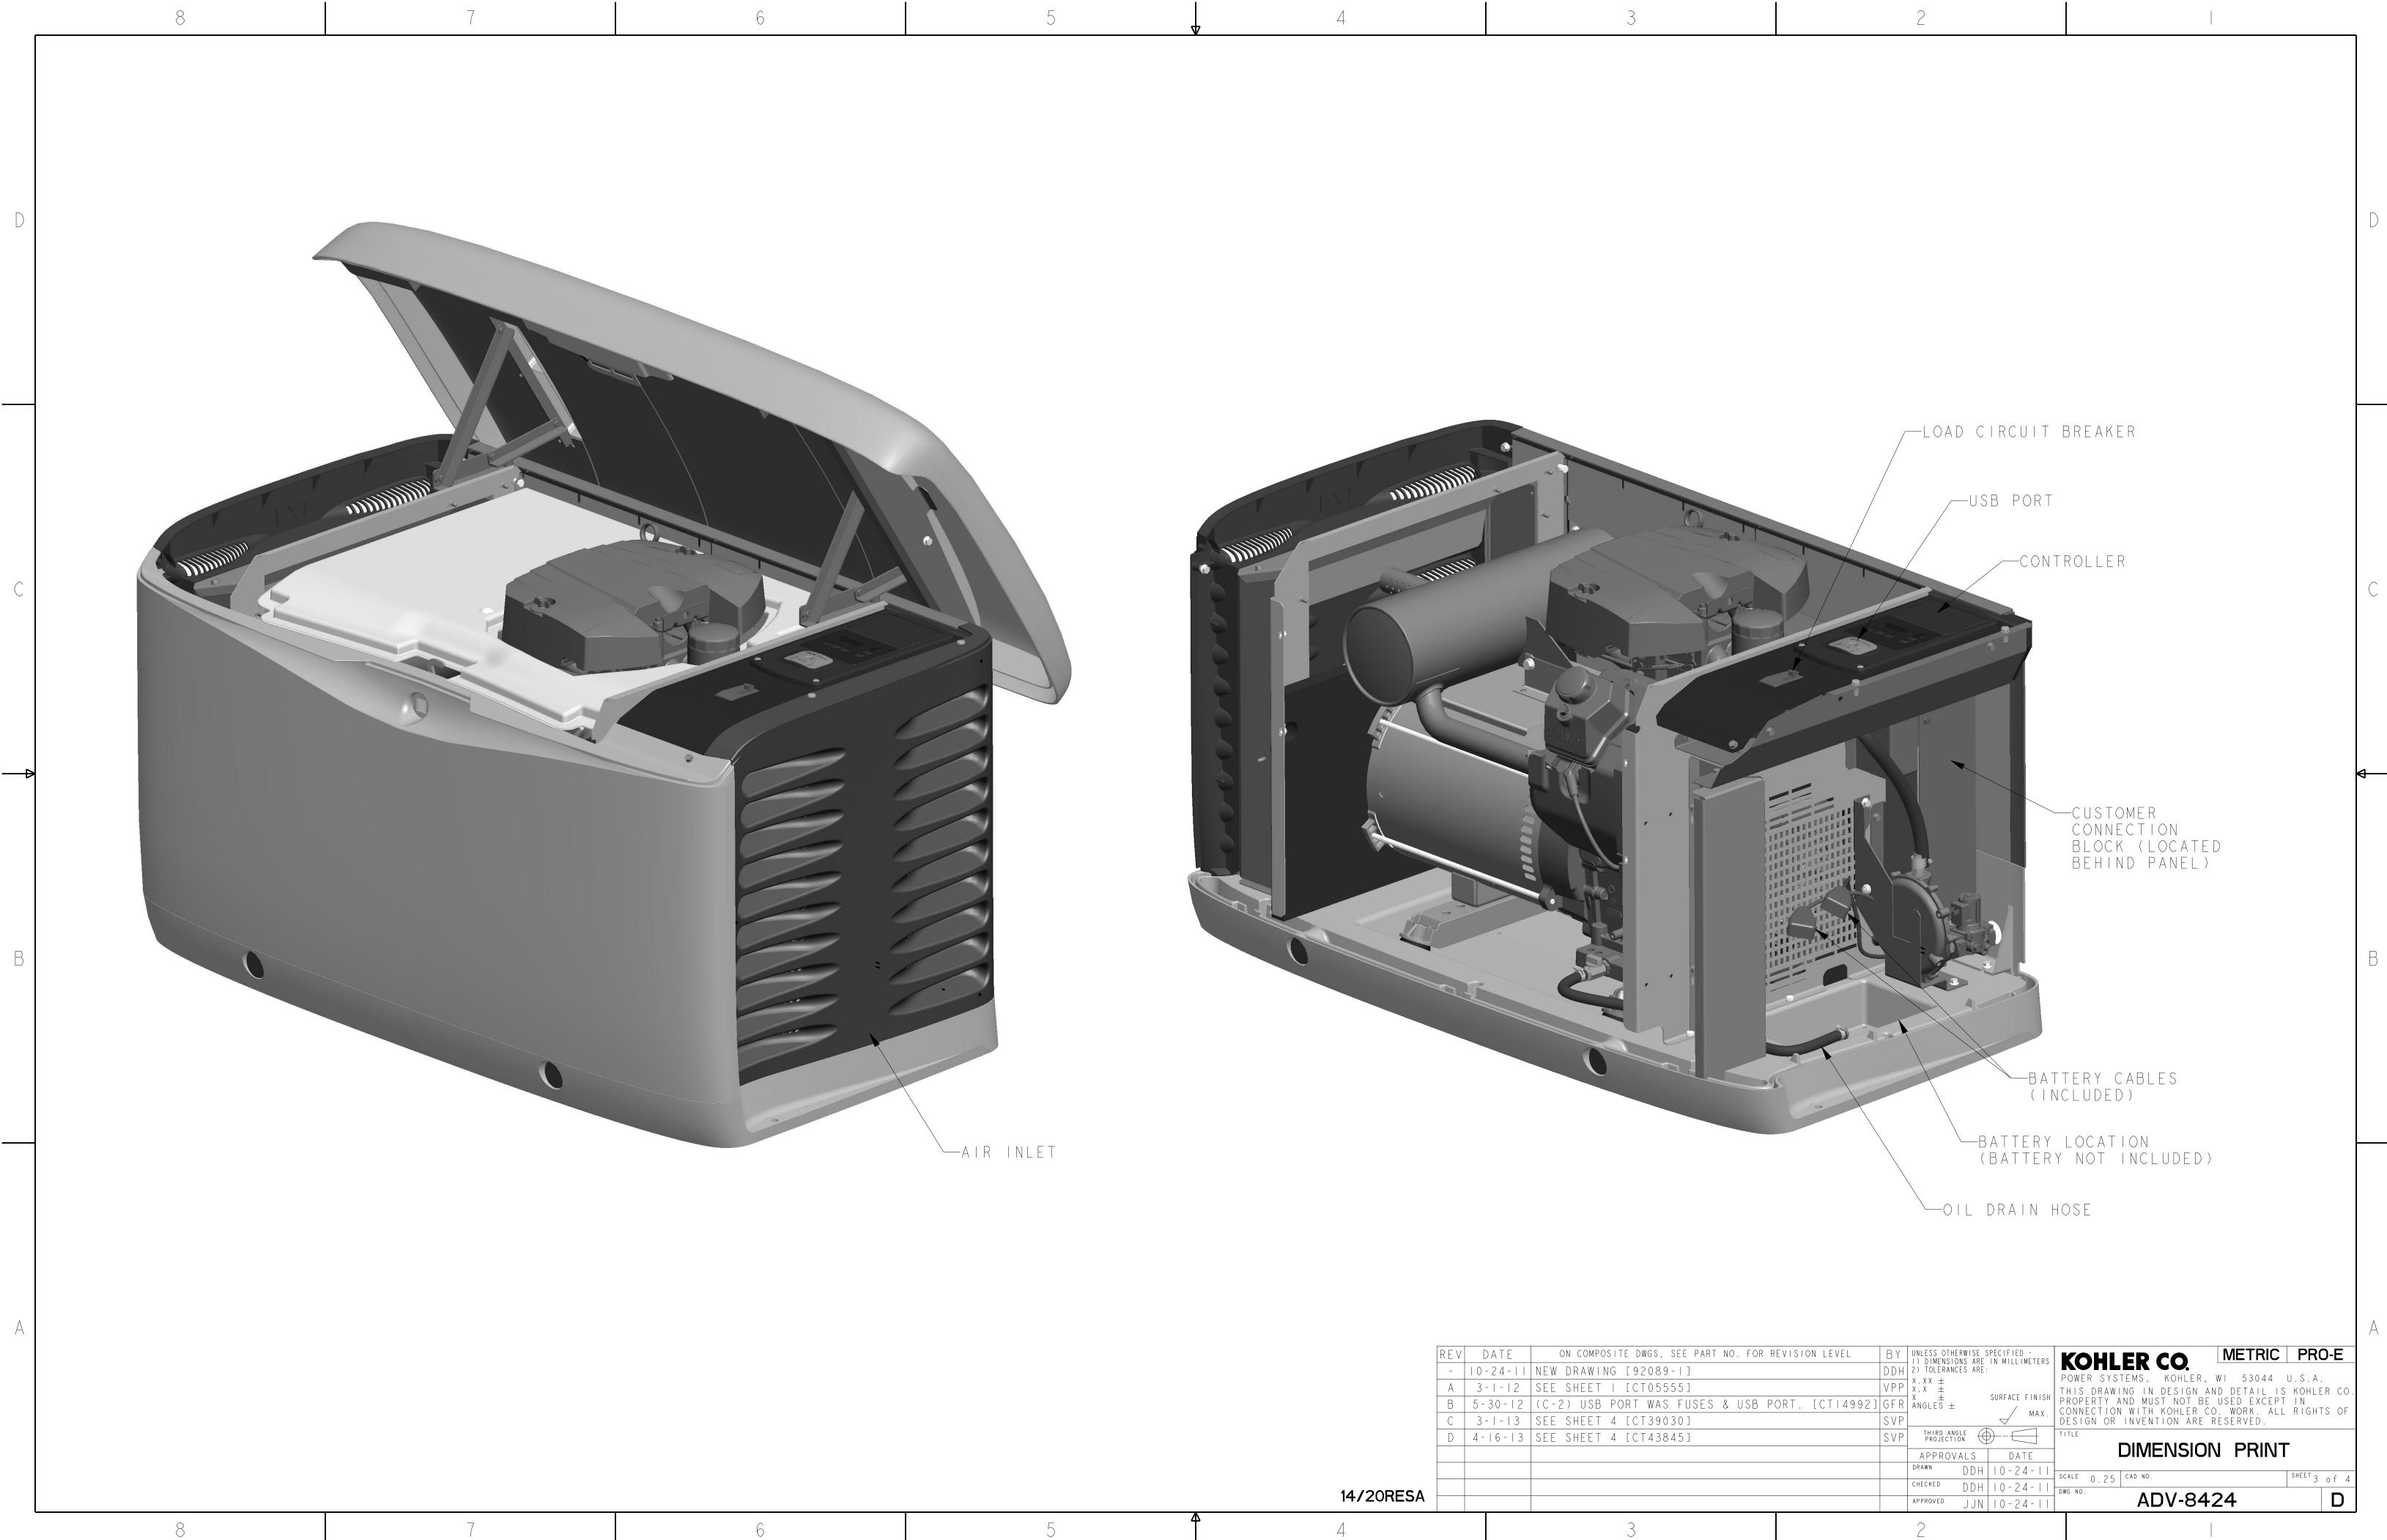

R	EV	DATE	ON COMPOSITE DWGS, SEE PART NO. FOR
	-	0-24-	NEW DRAWING [92089-1]
	А	3- - 2	SEE SHEET I [CT05555]
	В	5-30-12	(C-2) USB PORT WAS FUSES & USB
	С	3 - - 3	SEE SHEET 4 [CT39030]
	D	4 - 6 - 3	SEE SHEET 4 [CT43845]
			$\widehat{}$

8


D

С

В

	7		6	
OCCUPIED) STRUCTURE		occupie	ED STRUCTURE
<u>MIN.</u> T. RECOMMENDED				
				SET
	-SERVICE DOOR			AT EXHAUST END REMAINING SIDES
8 FT. RECOMMENDED				ALL
				6 IN. GRAVEL ON

4 FT. GRAVEL BED AT EXHAUST END IN. GRAVEL ON ALL REMAINING SIDES 9 SET

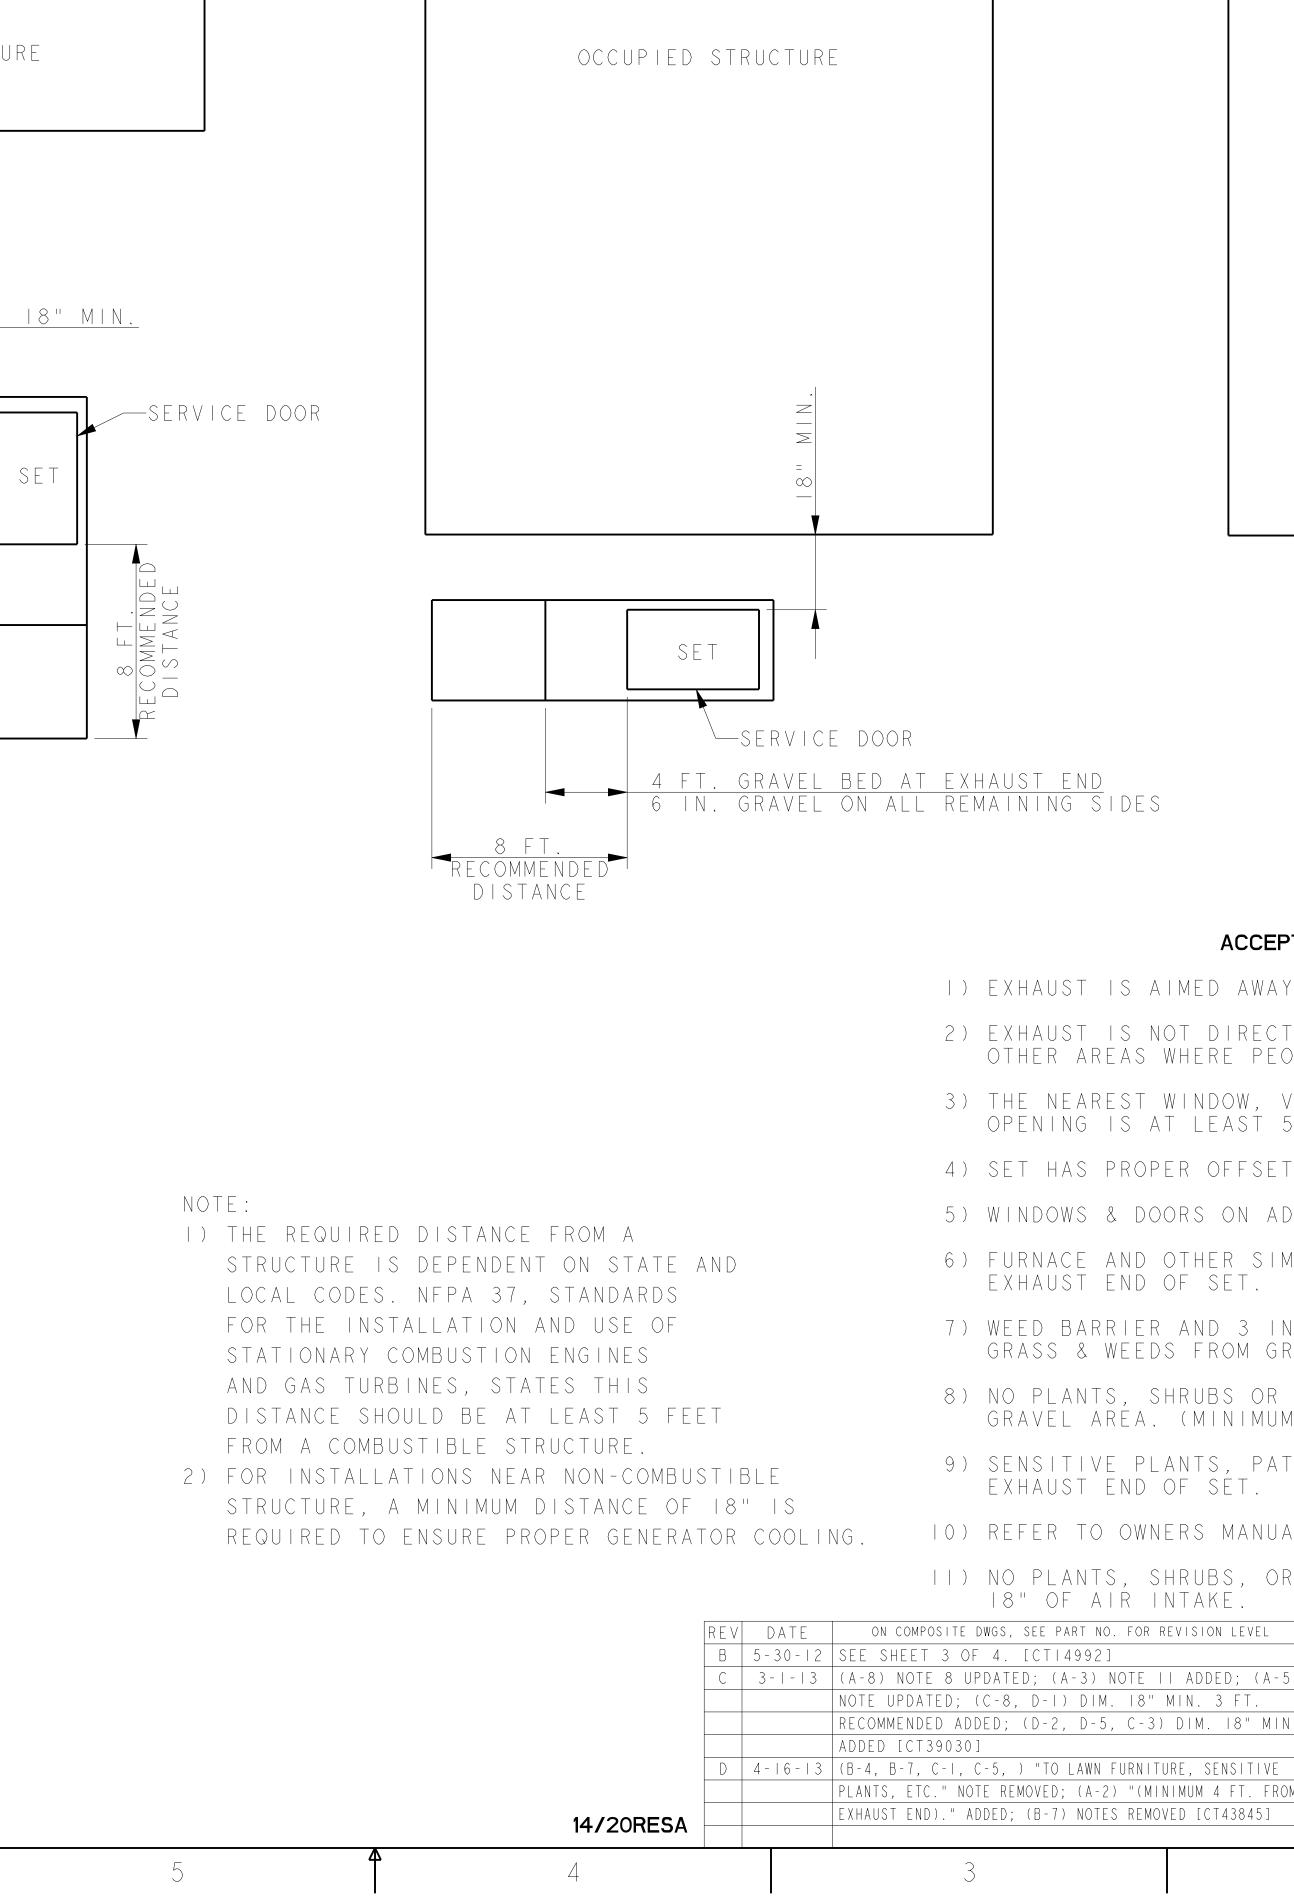

2	
OCCUPIED STRUCTURE	
A FT. GRAVEL BED AT EXHAUST END RECOMMENDED DISTANCE	
ACCEPTABLE A IMED AWAY OR PARALLEL TO STRUCTURE. NOT DIRECTED AT PLAY AREAS, PATIOS OR S WHERE PEOPLE CONGREGATE. T WINDOW, VENT, DOOR OR SIMILAR STRUCTURE AT LEAST 5 FEET FROM THE EXHAUST END OF THE SET. OPER OFFSET FROM STRUCTURE. DOORS ON ADJACENT WALLS ARE CLOSED. D OTHER SIMILAR INTAKES ARE AT LEAST 10 FEET FROM D OF SET. ER AND 3 INCH THICK GRAVEL BASE LOCATED TO PREVENT	Ē
EDS FROM GROWING TOO CLOSE TO THE SET. SHRUBS OR OTHER COMBUSTIBLES ALLOWED IN A. (MINIMUM 4 FT. FROM EXHAUST END). PLANTS, PATIO FURNITURE, ETC. ARE AT LEAST 8 FEET FROM ID OF SET. DWNERS MANUAL FOR OTHER INSTALLATION CONSTRAINTS. SHRUBS, OR OTHER COMBUSTIBLES ALLOWED WITHIN EINTAKE. FOR REVISION LEVEL BY ID ID MENSIONS ARE IN MULLIMETERS IS MIN. 3 FT. SVP THIND ANGLES ± NITURE, SENSITIVE INTURE, SENSITIVE ANGLES ± C-33 DIM. 18" MIN. SVP THIND ANGLE MITURE, SENSITIVE INTURE, SENSITIVE APPROVALS ID HIND ANGLE INTURE, SENSITIVE INTURE, SENSITIVE	Α
APPROVED JJN 10-24-11 ADV-8424 D	ļ