

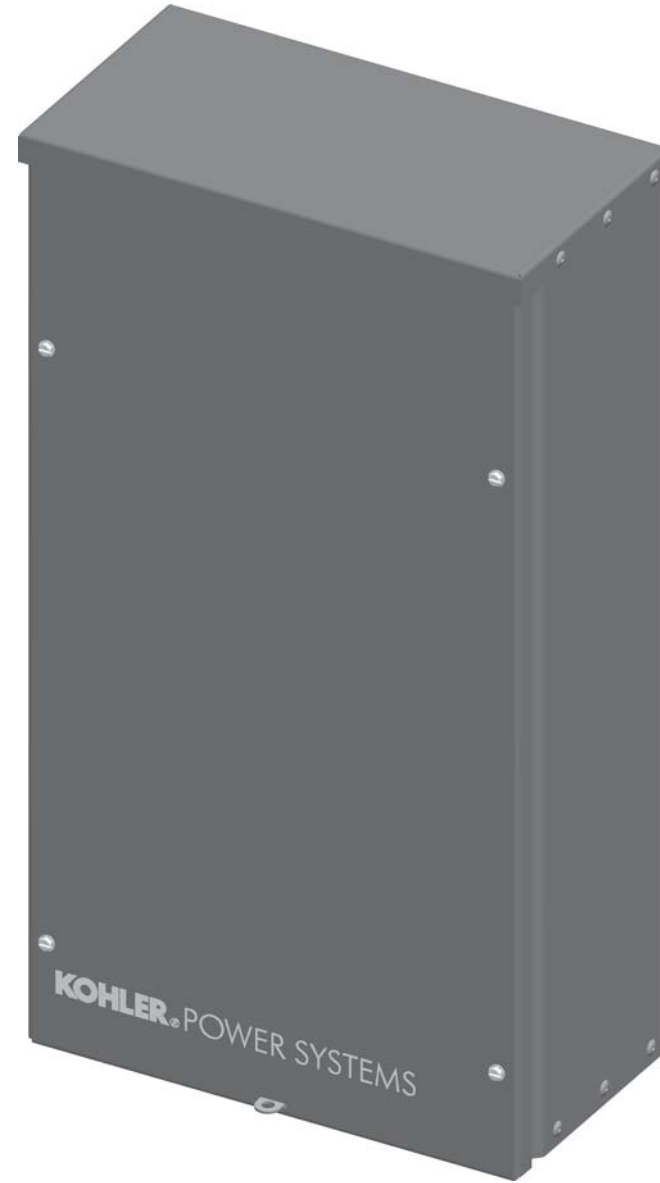
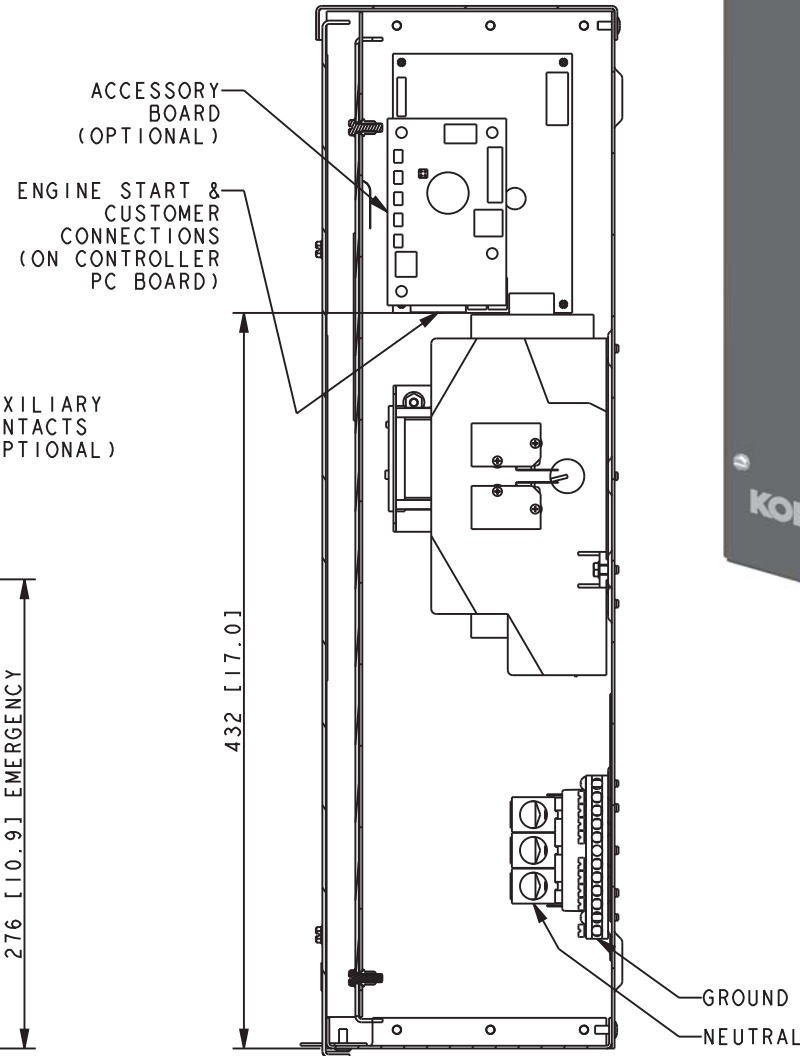
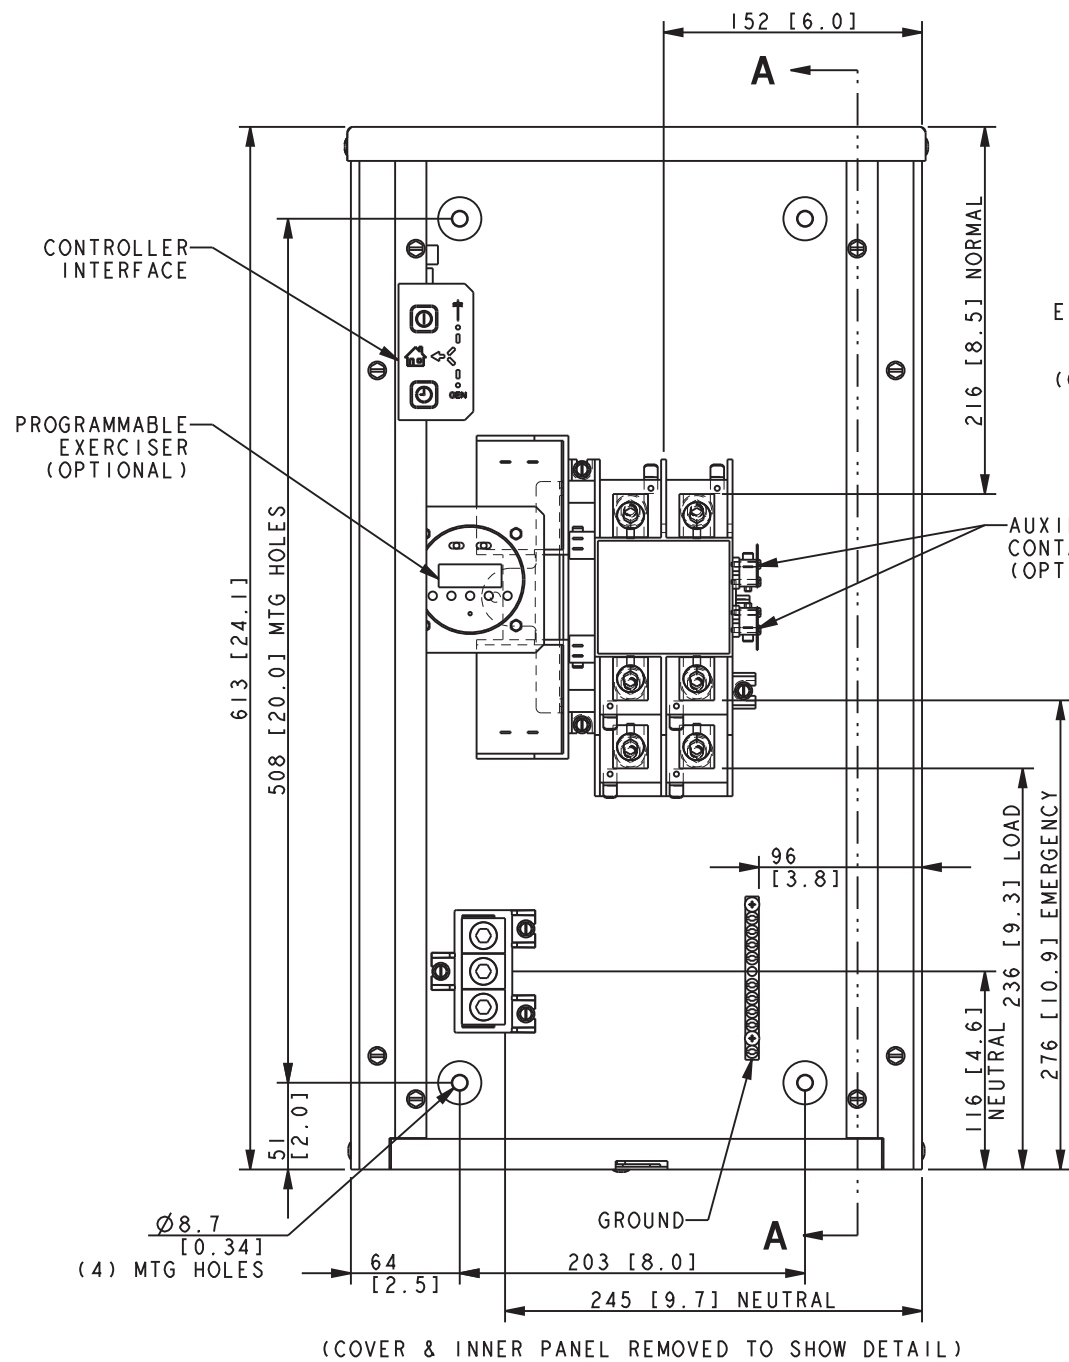


SCREW TYPE TERMINALS FOR EXTERNAL POWER CONNECTION			
SWITCH RATING (AMPS)	RANGE OF AL-CU WIRE SIZES		
	CONTACTOR (PER PHASE)	NEUTRAL	GROUND
200	(1) #6 TO 250 KCMIL	(3) #6 AWG TO 250 KCMIL	(9) #14 TO #4 AWG

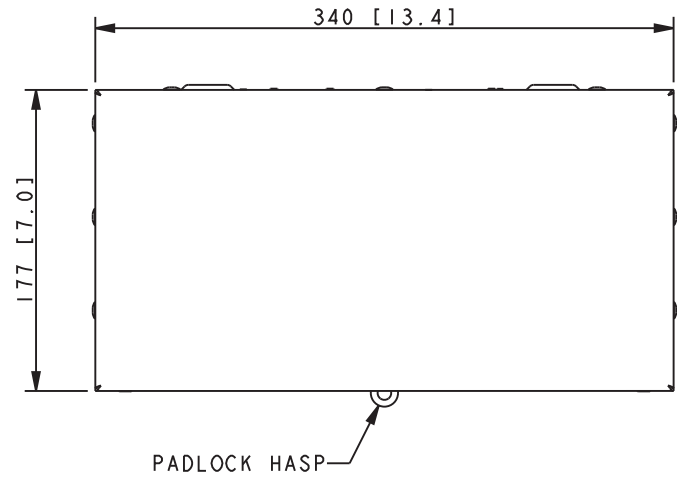

COVER SHOWN

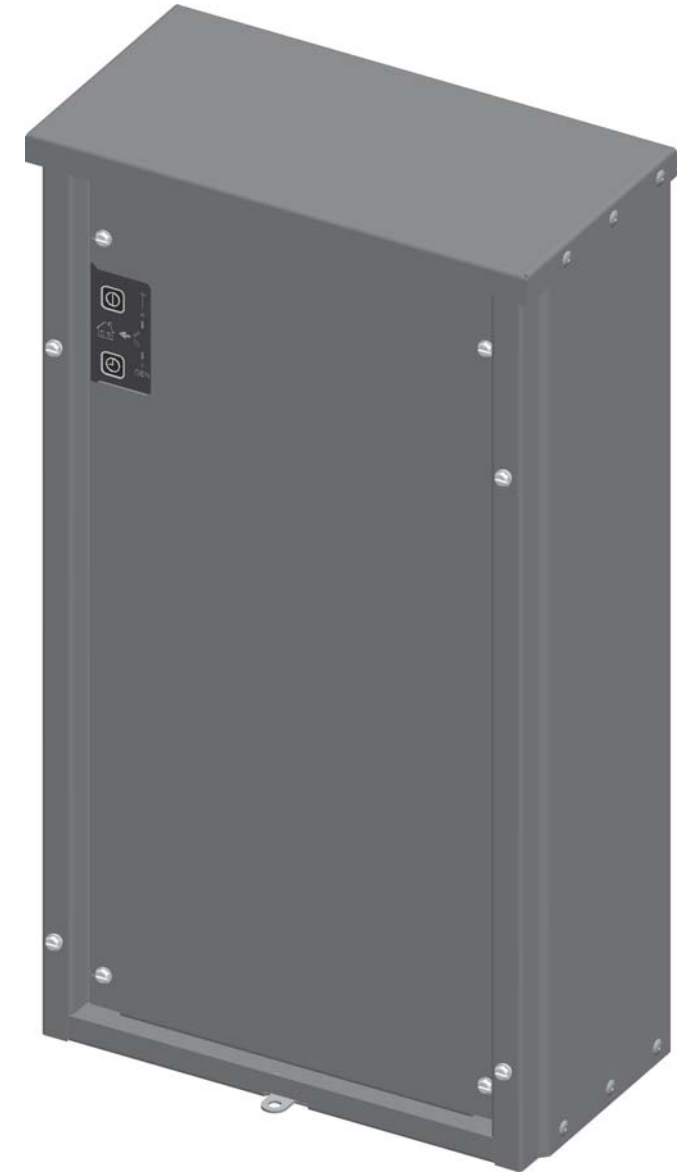

INNER PANEL SHOWN

NOTES:
 DIMENSIONS IN [] ARE INCHES.
 FINISH: ANSI 49 GRAY.
 REFER TO OPERATOR'S MANUAL PRIOR TO INSTALLATION AND OPERATION OF UNIT.
 APPROXIMATE WEIGHT: 7 Kg (15 LBS.)

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED - 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE:	APPROVALS	DATE	TITLE
-	8-16-11	NEW DRAWING [90714-4]	BTW	X.XX ± 0.25 X.X ± 1.0 X ± 1.5 ANGLES ± 0° 30' MAX.	BTW	8-16-11	KOHLER CO. METRIC PRO-E POWER SYSTEMS, KOHLER, WI 53044 U.S.A. THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.
				THIRD ANGLE PROJECTION			DIMENSION PRINT
				SCALE 0.45 CAD NO.			SHEET 1 of 1
				APPROVED MTL	8-16-11		ADV-8441

MODEL R
 200A RESIDENTIAL ATS
 MPAC 500 CONTROLLER
 STANDARD TRANSITION
 NEMA 3R ENCLOSURE

SECTION A-A

(COVER & INNER PANEL REMOVED TO SHOW DETAIL)

03/21/2012 Controlled Document